


# InteliLite LTC 90

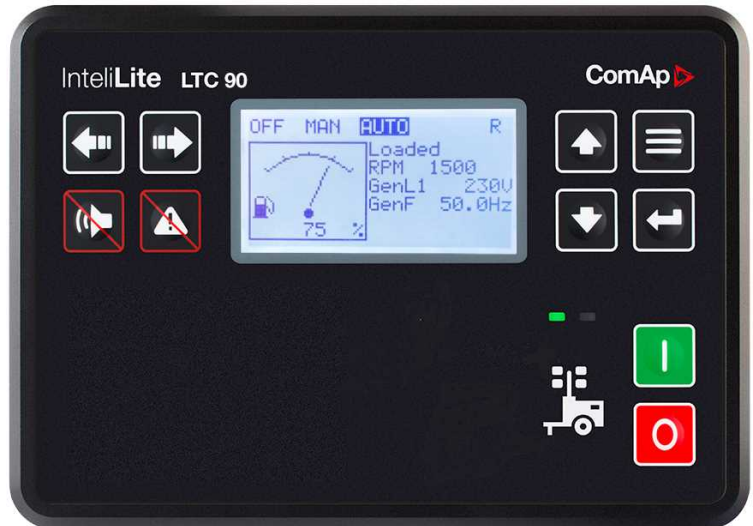

Order code: IL4LTC90BLA

## Controller for light tower applications

# Datasheet



### Product description

- › Single gen-set controller designed for Light Tower application

### Key features

- › Automatic Sunrise/Sunset calculation
- › In-build Lamp Management system
- › Low Temperature operation
- › 8 binary outputs, 8 + 1 binary inputs, 3 analogue inputs (U/I/R)
- › +5V output reference for analogue inputs
- › 2 high-current binary outputs
- › 1 slot for extension plug-in modules (Modbus, Internet, SMS, inputs/outputs)
- › Extension CAN modules
- › ECU support (Tier 4 Final, Stage V)
- › RTC with battery back-up (full calendar)
- › Power over USB for controller configuration
- › Zero power mode
- › True RMS measurement
- › In-built PLC, complemented with a PLC monitoring tool in InteliConfig
- › Full remote communications support (AirGate 2.0, WSV)
- › Internet access using Ethernet / 4G, Modbus TCP/RTU, SNMP v1/v2c
- › Active SMS and emails
- › Detailed history log with up to 150 records
- › Remote display
- › User setpoints and protections
- › 5 languages in the controller & Translator functionality
- › User Access Management
- › Cyber security improvement
- › Alternative configuration
- › Multi-purpose schedulers
- › 3 maintenance timers
- › Modbus register mapping possibility
- › Fuel pump management
- › Run Hours source selector

# Dimensions, terminals and mounting

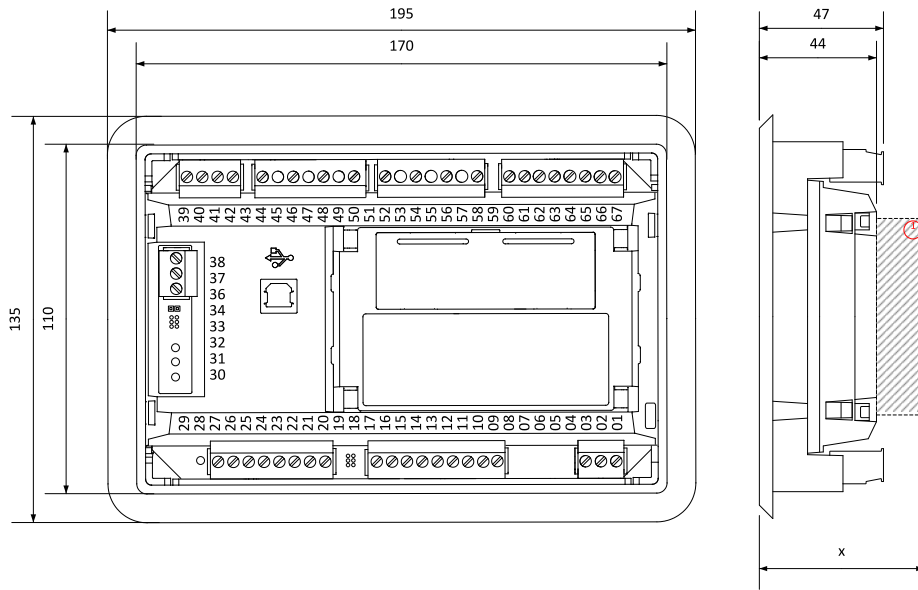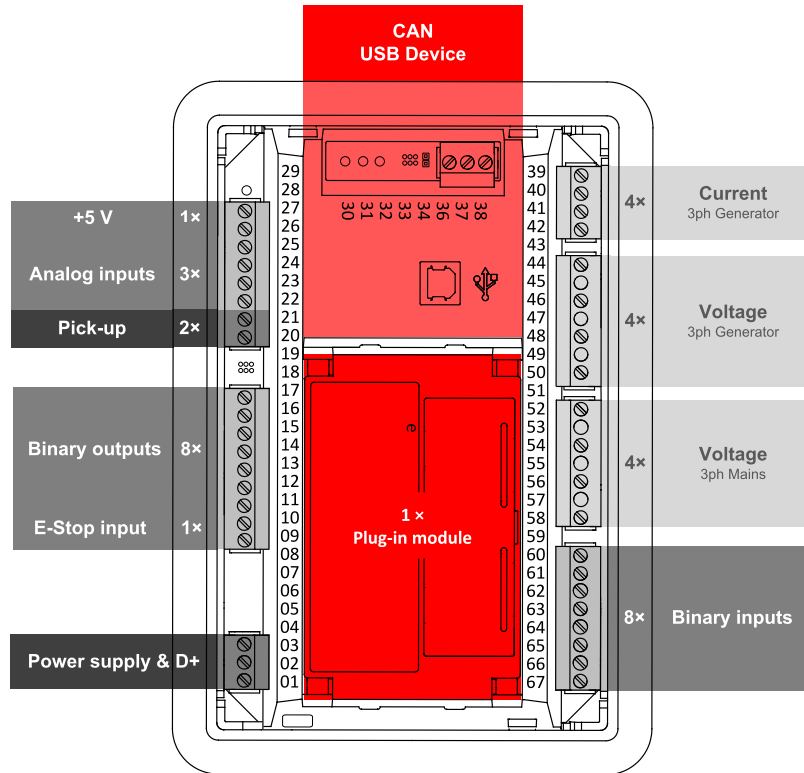

**Note:** The final depth of the controller depends on the selected plug-in module – it can vary between 41 mm and 56 mm. Mind also the size of connectors and cables (e.g. in case of RS232 connector, add about 60 mm more for standard RS232 connector and cable).

**Note:** The controller is to be mounted into panel doors as a standalone unit using provided holders. The requested cutout size is 172 × 112 mm. Use the screw holders delivered with the controller to fix the controller into the door.

# Technical data

## Power supply

Power supply range	8-36 VDC
Power consumption (without modules)	2.5 W
RTC battery	Replaceable (3 V)
Fusing power	4 A w/o BOUT consumption
E-Stop fusing	10 A
Max. Power Dissipation	7 W

## Operating conditions

Protection degree (front panel)	IP 65
Operating temperature	-40 °C to +70 °C
Storage temperature	-30 °C to +80 °C
Operating humidity	95 % non-condensing (EN 60068-2-30)
Vibration	5-25 Hz, $\pm 1.6$ mm 25-100 Hz, a = 4 g
Shocks	a = 500 m/s <sup>2</sup>
Surrounding air temperature rating 70 °C Suitable for pollution degree 2	

## D+

Max. output current	250 mA
Charging fail threshold	Adjustable

## Voltage measurement

Measurement inputs	3ph-n Gen voltage , 3ph-n Mains
Measurement range	10-277 V AC / 10-480 V AC (EU) 10-346 V AC / 10-600 V AC (US/Canada)
Linear measurement and protection range	350 V AC Ph-N 660 V AC Ph-Ph
Accuracy	1 %
Frequency range	30-70 Hz (accuracy 0.1 Hz)
Input impedance	0.72 M $\Omega$ ph-ph , 0.36 M $\Omega$ ph-n

## Display

Type	Build-in monochromatic 3.2"
Resolution	132 x 64 px

## Communications

USB Device	Non-isolated type B connector
CAN 1	Non-isolated, 250 / 50 kbps, Terminator impedance 120 $\Omega$

## Current measurement

Measurement inputs	3ph Gen current
Measurement range	5 A
Max. allowed current	10 A
Accuracy	$\pm 20$ mA for 0-2 A; 1 % of value for 2-5 A
Input impedance	<0.1 $\Omega$

## E-Stop

Dedicated terminal for safe E-Stop input.
Physical supply for binary outputs 1 & 2.

## Binary inputs

Number	8
Close/Open indication	0-2 VDC close contact 6-36 VDC open contact

## Binary outputs

Number	8
Max. current	BO1,2=5 A (60 °C); BO1,2=4 A (70 °C), BO3-8=0.5 A
Switching to	positive supply terminal

## Analog inputs

Number	3, switchable (R/U/I)
Range	R = 0-2500 $\Omega$ ; U = 0-10 V; I = 0-20 mA
Accuracy	R: $\pm 2$ % from value $\pm 5$ $\Omega$ in range 0-250 $\Omega$ R: $\pm 4$ % from value in range 250 $\Omega$ -2500 $\Omega$ U: 1 % from value $\pm 100$ mV I: 1 % from value $\pm 0.2$ mA

## +5 V Power supply output

Max. current	45 mA
--------------	-------

## Magnetic pickup

Voltage input range	4 Vpk-pk to 50 Vpk-pk in range 4 Hz to 1 kHz 6 Vpk-pk to 50 Vpk-pk in range 1 to 5 kHz 10 Vpk-pk to 50 Vpk-pk in range 5 to 10 kHz
Frequency input range	4 Hz to 10 kHz
Frequency measurement tolerance	0.2 % from measured value

## Available plug-in modules

Product	Description	Order code
CM-RS232-485	Dual port interface	<a href="#">CM223248XBX</a>
CM2-4G-GPS	4G & GPS plug-in communication module	<a href="#">CM24GGPSXBX</a>
CM3-Ethernet	Internet / Ethernet plug-in communication module	<a href="#">CM3ETHERXBX</a>
EM-BIO8-EFCP	8 additional binary inputs/outputs	<a href="#">EM2BIO8EXBX</a>

**Note:** Controller has 1 slot for plug-in modules.

## Available CAN modules

Product	Description	Order code
IGL-RA15	CAN remote annunciator with 15 LEDs	<a href="#">EM2IGLRABAA</a>
Inteli AIN8	CAN module with 8 analog inputs	<a href="#">I-AIN8</a>
Inteli IO8/8	CAN module with 8 binary inputs and 8 binary outputs	<a href="#">I-IO8/8</a>
IGS-PTM	CAN module with 8 binary inputs, 8 binary outputs, 4 analog inputs and 1 analog output	<a href="#">IGS-PTM</a>
Inteli AIN8TC	CAN module with 8 analog inputs dedicated for thermocouple sensors only.	<a href="#">I-AIN8TC</a>
Inteli AIO9/1	CAN module with analog inputs and outputs – designed for DC measurement.	<a href="#">I-AIO9/1</a>

## Functions and protections

Support of functions and protections as defined by ANSI (American National Standards Institute):




Description	ANSI code	Description	ANSI code
Master unit	1	Incomplete sequence relay	48
Stopping device	5	Overcurrent	50/50TD
Multi-function device	11	Earth fault**	50G
Overspeed	12	Breaker failure	50BF
Underspeed	14	Overcurrent IDMT	51
Starting-to-running transition contactor	19	AC circuit breaker	52
Thermal relay	26	Overvoltage	59
Undervoltage	27	Aux Over Voltage	59X
Aux Battery Under Voltage	27X	Pressure switch	63
Annunciator	30	Liquid level switch	71
Overload (real power)	32P	Alarm relay***	74
Reverse power	32R	Reclosing relay	79
Master sequence device	34	Overfrequency	81O
Unit sequence starting*	44	Underfrequency	81U
Current unbalance	46	Auto selective control/transfer	83
Voltage unbalance/Negative sequence voltage	47		

\*Dual-operation

\*\*Extension module EM-BIO8-EFCP required

\*\*\* extension module IGL-RA15 required

## Certifications and standards

<ul style="list-style-type: none"> <li>&gt; EN 61000-6-2</li> <li>&gt; EN 61000-6-4</li> <li>&gt; EN 61010-1</li> <li>&gt; EN 60068-2-1 (-40 °C/16 h)</li> <li>&gt; EN 60068-2-2 (70 °C/16 h)</li> </ul>	<ul style="list-style-type: none"> <li>&gt; EN 60068-2-6 (2±25 Hz / ±1,6 mm; 25±100 Hz / 4.0 g)</li> <li>&gt; EN 60068-2-27 (a=500 m/s<sup>2</sup>; T=6 ms)</li> <li>&gt; EN 60068-2-30:2005 25/55°C, RH 95%, 48hours</li> <li>&gt; EN 60529 (front panel IP65, back side IP20)</li> <li>&gt; UL 6200</li> </ul>	 	
--	--	--	---



E-mail: [info@comap-control.com](mailto:info@comap-control.com)

Web: [www.comap-control.com](http://www.comap-control.com)

**ComAp**   
The heart of smart control

**Supplier's Declaration of Conformity**  
**47 CFR § 2.1077 Compliance Information**

**Unique identifier:** IL4LTC90BLA

**Responsible Party:**

Kevin Counts

10 N Martingale Rd #400

60173 - Schaumburg, IL

USA

Tel: +1 815 636 2541

E-mail: [info.us@comap-control.com](mailto:info.us@comap-control.com)

**FCC Compliance Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



E-mail: [info@comap-control.com](mailto:info@comap-control.com)  
Web: [www.comap-control.com](http://www.comap-control.com)

